

鎢鋼定位鑽

Carbide Position Drill

	低碳素鋼	中碳素鋼	高碳素鋼	合金鋼	工具鋼	調質鋼	淬火鋼			鑄鋼	鑄鐵	黃銅	青銅	紅銅	鋁合金	不銹鋼			鈦合金	鎳基合金	碳纖維	玻璃纖維	
	Low Carbon Steels	Medium Carbon Steels	High Carbon Steels	Alloy Steels	Tool Steels	Hardened Steels	Quenched and Tempered Steels			Cast Steels	Cast Iron	Brass	Bronze	Copper	Aluminum Rolled	Stainless Steels			Titanium Alloys	Nickel Alloys	carbon fiber	glass fiber	
	C0.25% 以下	C0.25% ~0.45%	C0.45% 以上	SCM	SKD	HRC 20~30	HRC 30~40	HRC 40~50	HRC 50~60	SC	FC	FCD	BS	PB	CU	AL	300	400	600	TI			
鋁用											○		◎	◎	◎								
鋼用	◎	◎	◎	◎	○	◎	○	○		○	◎	◎			○	○	○	○	○	○	○		

○ 適用 ◎ 專用



特性:

- ◆ 特殊刃口設計，使倒角加工面有良好的表面粗糙度，並提升刀具壽命。
- ◆ 適合倒角用。

鋁用



鋼用

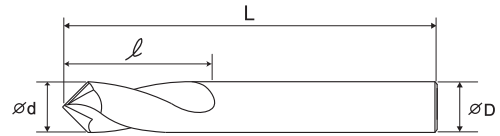

60度/PF060M

單位:mm(Unit:mm)

刀具料號 Model No.	刃徑 d Diameter	溝長 l Grooving Length	全長 L Overall Length	柄徑 D Shank Diameter	在庫
PF060MA03A	3	6	50	3	●
PF060MA03B					●
PF060MB04A	4	8	50	4	●
PF060MB04B					●
PF060MN05A	5	10	50	5	●
PF060MN05B					●
PF060MC06A	6	12	50	6	●
PF060MC06B					●
PF060MD08A	8	16	60	8	●
PF060MD08B					●
PF060ME10A	10	20	60	10	●
PF060ME10B					●
PF060MF12A	12	24	60	12	●
PF060MF12B					●
PF060MI16A	16	32	75	16	●
PF060MI16B					●

刀具料號末碼為A(鋁用) / B(鋼用)版

○: 接單生產品 ●: 在庫品 ▲: 訂製品